

Endless Woven Belts

Coatings, Impregnations, Profiles & Standard Applications

**Innovation and
Service in Belting**

Endless Woven Belts

Tolerances		
Length	Width	Thickness
PR series		
+/- 2%;	< 1000 mm +/- 1 mm	+/- 0.2 mm
+/- 20 mm min.	1000 - 3000 mm +/- 2 mm	
	> 3000 mm +/- 3 mm	
GK100 series		
+/- 2%;	Slit	+/- 0.2 mm
+/- 20 mm min.	< 1000 mm +/- 1 mm	
	1000 - 3000 mm +/- 2 mm	
	> 3000 mm +/- 3 mm	
	Not slit	
	+/- 2%; min. +/- 5 mm	
GK1000 series not used as AmPull		
+/- 2%;	Slit	+/- 0.2 mm
+/- 20 mm min.	< 1000 mm +/- 1 mm	
	1000 - 3000 mm +/- 2 mm	
	> 3000 mm +/- 3 mm	
	Not slit	
	+/- 2%; min. +/- 5 mm	
GK1000 series used as AmPull		
1002-1402-1752 +/-0.7%	Slit	+/- 0.2 mm
2502-4502 +/- 1% 20 mm min	< 1000 mm +/- 1 mm	
L < 1500 mm +/- 2% 20 mm min	1000 - 3000 mm +/- 2 mm	
	> 3000 mm +/- 3 mm	
	Not slit	
	+/- 2%; min. +/- 5 mm	
GK212 series		
+/- 2%;	Slit	+/- 0.2 mm
+/- 20 mm min.	< 1000 mm +/- 1 mm	
	1000 - 3000 mm +/- 2 mm	
	> 3000 mm +/- 3 mm	
	Not slit	
	+/- 2%; min. +/- 5 mm	
AmDough		
+/- 2%;	+/- 2%; min. +/- 5 mm	+/- 0.2 mm
+/- 20 mm min.		
AmWrap		
+/- 2%;	Slit	+/- 0.2 mm
+/- 20 mm min.	< 1000 mm +/- 1 mm	
	1000 - 3000 mm +/- 2 mm	
	> 3000 mm +/- 3 mm	
	Not slit	
	+/- 2%; min. +/- 5 mm	
AmWrap Hot		
+/- 2%;	+/- 2%; min. +/- 30 mm	+/- 0.5 mm
+/- 20 mm min.		
AmSqueeze		
+/- 1%	-0,+2 mm	+/- 0.2 mm
AmTube		
+/- 0.7%;	+/- 1 mm	+/- 0.2 mm

Quick-Reference – Endless Woven, seamless belting

Quick-Reference list

Article Code (Line1)	Series	Force N/mm at 1% Elongation	Thickness in mm	Minimum Length mm	Maximum Length mm	Minimum width mm	Maximum width mm	Seamless Endless Woven	Double-ply Not Endless	Double fabric Not Endless	Plain Weave	Twill Weave	Broken Twill Weave	Straight Warp	Warp top	Warp bottom	We ft	Coated	Uncoated	Selvedge	Cut edge-Spun-When coated	Cut edge-Spun-When both sides coated	Cut Edge spun when coated
PR343	PR	0.5	260	2160	10 4000	■	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
PR346	PR	0.9	260	2160	10 4000	■	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
PR3420	PR	1.6	2161	8000	10 4000	■	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
PR4000	PR-Heavy	1.4	2161	8000	10 4000	■	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
PR6000	PR-Heavy	1.6	2161	8000	10 4000	■	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
PR346E	PR-Elastic	0.8	260	2000	10 4000	■	■	■	■	■	■	■	■	ES-Elastic	ES	■	■	■	■	■	■	■	
PR3420 E	PR-Elastic	1.2	2001	5000	10 4000	■	■	■	■	■	■	■	■	ES-Elastic	ES	■	■	■	■	■	■	■	
(G)K101	GK-Light	15	1.0	800	52000	10 3400	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
(G)K103	GK-Light	20	1.4	800	52000	10 3400	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
(G)K106	GK-Light	30	1.8	800	52000	10 3400	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
(G)K109	GK-Light	35	2.0	800	52000	10 3400	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
(G)K112	GK-Light	40	2.5	800	52000	10 3400	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
(G)K115	GK-Light	40	3.0	800	52000	10 3400	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
(G)K121	GK-Light	40	4.0	800	52000	10 3400	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
AmPull GK1002SE	AmPull	50	1.6	900	52000	66 760	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
AmPull GK1402SE	AmPull	70	3.0	900	52000	66 760	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
AmPull GK1752SE	AmPull	85	3.5	900	52000	66 760	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
AmPull GK1752FE	AmPull	85	3.5	900	52000	66 760	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
AmPull GK2502SE	AmPull	125	3.0	900	52000	66 560	■	■	■	■	■	■	■	ES-A	ES	■	■	■	■	■	■	■	
AmPull GK4502SE	AmPull	250	3.0	900	52000	66 360	■	■	■	■	■	■	■	ES-A	ES	■	■	■	■	■	■	■	
AmWrap GK112	AmWrap	40	2.5	2500	52000	100 3400	■	■	■	■	■	■	■	ES	ES	■	■	■	■	■	■	■	
AmWrap GK1002	AmWrap	50	1.6	2500	52000	100 3400	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
AmWrap GK1402	AmWrap	70	3.0	2500	52000	100 3400	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
AmWrap GK1752	AmWrap	85	3.5	2500	52000	100 3400	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
AmWrap GK2502	AmWrap	125	3.0	2500	52000	100 3400	■	■	■	■	■	■	■	ES-A	ES	■	■	■	■	■	■	■	
AmPress GK1752	AmPress	85	3.5	2500	52000	100 3400	■	■	■	■	■	■	■	E	ES	■	■	■	■	■	■	■	
1120	Open Weave	3.5	800	400000	40 3500	■	■	■	■	■	■	■	■	E	E ES	■	■	■	■	■	■	■	
0412	Open Weave	2.8	800	400000	40 3500	■	■	■	■	■	■	■	■	E	ES ES	■	■	■	■	■	■	■	
1220	Open Weave	3.2	800	400000	40 3500	■	■	■	■	■	■	■	■	ES	ES ES	■	■	■	■	■	■	■	
0506	Open Weave	2.4	800	400000	40 3500	■	■	■	■	■	■	■	■	CS	CS CS	■	■	■	■	■	■	■	
2M202	Open Weave	1.4	800	52000	10 1900	■	■	■	■	■	■	■	■	E	E ES	■	■	■	■	■	■	■	
(G)K212N	GK-Temperature	2.6	800	52000	40 3400	■	■	■	■	■	■	■	■	AS	AS	■	■	■	■	■	■	■	
(G)K212NT	GK-Temperature	2.6	800	52000	40 3400	■	■	■	■	■	■	■	■	AS-A	AS	■	■	■	■	■	■	■	
(G)K212T	GK-Temperature	2.2	800	52000	40 3400	■	■	■	■	■	■	■	■	A	AS	■	■	■	■	■	■	■	
(G)K212T-C	GK-Temperature	1.8	800	52000	40 3400	■	■	■	■	■	■	■	■	A	A	■	■	■	■	■	■	■	
(G)K1.8 LT	GK-Temperature	1.8	800	52000	40 3400	■	■	■	■	■	■	■	■	A	L	■	■	■	■	■	■	■	
(G)K5A	GK-Alu	5.0	800	52000	40 3400	■	■	■	■	■	■	■	■	A	A	■	■	■	■	■	■	■	
SW6A	GK-Alu	6.0	800	52000	40 500	■	■	■	■	■	■	■	■	AS-A	AS	■	■	■	■	■	■	■	

General information Endless Woven, seamless belting

NATURAL YARNS

Cotton (CS): pappus of cotton plant; moisture absorption 20%; temperature approx. 200°C.

Linen and flax: raw material of vegetable fibres; moisture absorption 25%; gives a good stability for uncoated belts; temperature approx. 200°C.

SYNTHETIC YARNS

Polyester continuous (E): moisture absorption 0.4%; resistant to chlorine, acids (diluted), sunlight, rot and mildew; max. applicable temperature approx. 160°C.

Polyester spun (ES): same as continuous polyester; is produced continuously, and then chopped and spun.


Polyamide (P), brand name Nylon®: moisture absorption 4%; resistant to alkalines, acids (diluted), sunlight, rot and mildew; max. applicable temperature approx. 140°C; better resistant to wear than polyester.

Aramide multifilament continuous (A), brand name Twaron® or Kevlar®: high strength; max. applicable temperature approx. 350°C.


Aramide spun (AS), brand name Nomex®: good adhesion of coatings; max. applicable temperature approx. 250°C.

Weave types


Plain weave P



Twill weave K



Broken twill weave GK



All fabrics can be made in antistatic execution.

Fabrics: Dimensions availability				
Description	Width min mm*	Width max mm*	Length min mm*	Length max mm*
GK100/GK1000/GK212/AmDough	40	580	800	1199
/AmDough-Fabric/P1,0T/2-ply/AmPull	40	1300	1200	1699
/AmWrap/AmPress	40	1600	1700	2199
	40	3400	2200	44999
	40	2600	45000	52000

Endless Woven belts

Food Grade Coatings for Endless Woven Belting																		
Material	Name (Hardness shore A unless stated otherwise)	0 ivory	0 transparent	1 white	2 green	3 red	5 black	7 grey	18 petrol	22 dark green	23 yellow	27 orange	29 light grey	45 light blue	63 beige	Cover possible	Impregnation possible	Max. width mm
PVC	Flexam 35						⊙									✓	✓	1900
	Flexam 45	●		●												✓	✓	1900
	Flexam 55				●		⊙									✓	✓	1900
	Flexam 70						⊙	⊙	●							✓	✓	1900
	Flexam 70 FG				●											✓	✓	1900
	Flexam 80		●				⊙	⊙	●	●						✓	✓	1900
	Flexam 80 FG			●	●									●		✓	✓	1900
	Flexam 85 FR			FDA	FDA					FDA						✓	✓	1900
	Flexam 95			●	●		⊙	⊙	●							✓	✓	1900
	Flexam / Norton 85				●											✓	✓	1900
	Flexam / Polonyl 40			FDA				⊙								✓	✓	1900
	Nonex 20				●											✓	✓	1900
	Nonex 30				●	●		⊙								✓	✓	1900
	Nonex 40				●	●		⊙	⊙					●		✓	✓	1900
	Nonex 55				●	●		⊙	⊙					●		✓	✓	1900
	Nonex 65				●			⊙								✓	✓	1900
	Nonex 65 FG		●		●									●		✓	✓	1900
	Nonex 65 FG AM													●		✓	✓	1900
	Nonex 70				●											✓	✓	1900
	Nonex 70 FR					⊙										✓	✓	1900
Nonex 80					●										✓	✓	1900	
Ampac + H7															-	✓	1900	
TPU	Ropanyl 76 FG	●														✓	✓	1900
	Ropanyl 85						●									✓	✓	1900
	Ropanyl 85 FG		●	●										●		✓	✓	1900
	Ropanyl 93						●									✓	✓	1900
	Ropanyl 93 FG		●	●						●				●		✓	✓	1900
	Ropanyl 93 FG AM													●		✓	✓	1900
	Ropanyl D60	●														✓	✓	1600
Ultranlyl 85 FG				●			●								✓	✓	1900	
PUR	Ropan 70, 80, 90			⊙												✓	-	3400
	Ropanol		●													-	✓	4000
	Polam A-H FG		●	●	●			⊙					●			-	✓	4000
	Polam A-H AM FG												●			-	✓	4000
PE	Poliflex 90		●													✓	-	1900
	Poliflex D33, D42 FG		●													✓	✓	1900
TPE-S	Peflex 30	●														✓	✓	1900
TPE-E	Amtel D40 FG	●											●			✓	✓	1900
TPB	Pletex 35					⊙										✓	-	1900
Si	Silam B 10		⊙	⊙		⊙	⊙							⊙		✓	✓	1900
	Silam B 40							●								✓	✓	1900
	Silam B 40 FG		●	●		●	●							●		✓	✓	1900
	Silam S K55						⊙						⊙			✓	✓	3400
	Silam S 40 FG		●	●		●	●							●		✓	✓	1900
	Silam S 40 FG AM													●		✓	✓	1900
	Silam S 50 FG		●	●		●	●							●		✓	✓	1900
Silam S 60 FG		●	●		●	●							●		✓	✓	1900	

●: EU
 ●: EU (non-fat environment)

⊙: Not Food grade
 FDA: Only FDA approval (non-fat environment)

Endless Woven belts

Cover types for Endless Woven Belting												
Name	Material	Temperature range				Hardness Shore	Thermo-plastic	Oil & fat resistant	Non-stick	Chemical resistance	Application / Properties	
		Continuous		Short								
		Min.	Max.	Min.	Max.							
Flexam	PVC	-10	+90	-15	+100	35 - 95A	yes	no	■ ■	■ ■ ■	General, non-food	
Nonex	PVC	-5	+80	-10	+110	30 - 80A	yes	yes	■ ■ ■	■ ■ ■	Food, EC/FDA: Shore 65A white, light blue, transparent	
Ropanyl	TPU	-20	+90	-30	+110	85 - 93A	yes	yes	■ ■ ■ ■	■ ■ ■	Food, EC/FDA: white, light blue	
Ropanyl 76 FG	TPU	-30	+85	-35	+105	76A	yes	yes	■ ■ ■ ■	■ ■ ■	Food, EC/FDA0, separator belting, rubber-like properties, cable pulling (hysteresis resistant)	
Ropanyl D60	TPU	0	+120	-10	+140	60D	yes	yes	■ ■ ■ ■	■ ■ ■	Accumulation, steel wrapping, higher temperature	
Ultranyl	TPU	-30	+100	-30	+110	85 - 93A	yes	yes	■ ■ ■ ■	■ ■ ■	Food, EC/FDA: white, temperature shocks; hydrolysis resistance	
Ropan	PUR	-20	+90	-30	+110	70 - 90A	no	yes	■ ■	■ ■ ■	Metal, stone industry, cut and wear resistant	
Ropan 70 closed edges	PUR	-20	+90	-30	+110	70A	no	yes	■ ■	■ ■ ■	Tube winding, high friction, wear resistant	
Peflex	TPE-S	-30	+60	-30	+80	30A	yes	yes	■ ■	■ ■ ■ ■ ■ ■	Tobacco, food, FDA, high grip	
Poliflex	PE	-60	+60	-70	+70	33D, 42D	yes	yes	■ ■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■	Tobacco, food / non-stick, EC/FDA (previously Peflex PE: note hardness)	
Amtel	TPE-E	-20	+100	-30	+110	40D	yes	yes	■ ■ ■	■ ■ ■	Tobacco, food / non-stick, EC/FDA (previously Peflex PE: note hardness)	
Pletex	TPB	-5	+80	-15	+100	35A	yes	no	■ ■ ■	■ ■	High friction in dry and light applications, thermo-plastic Linatex alternative	
Silam K	Si	-50	+190	-80	+220	55A	no	yes	■ ■ ■ ■ ■	■ ■ ■ ■ ■	Foil seal, leather printing, grinding possible, temperature, non-stick	
Silam B	Si	-50	+190	-80	+220	10 - 30A	no	yes	■ ■ ■ ■ ■ ■	■ ■ ■ ■ ■ ■	Food, FDA: white, temperature, non-stick, friction; mechanically stronger than Silam K	
Silam S	Si	-50	+190	-80	+220	40 - 60A	no	yes	■ ■ ■ ■ ■	■ ■ ■ ■ ■	Food, FDA, temperature, non-stick, friction, sausage belts, grinding possible	

Impregnation types

Name	Material	Temperature range				Oil & fat resistant	Non-stick	Chemical resistance	Friction	Wear resistant	Application /Properties
		Continuous		Short							
		Min.	Max.	Min.	Max.						
Polam A-H	PUR	-15	+100	-25	+110	yes	■■■■	■■■■	Very low	■■■■■■	General impregnation
Ropanol P	PUR	-15	+100	-25	+110	yes	■■■■	■■■■	Low	■■■■	Impregnation AmDough bakery extraction belts
Flexam 95	PVC	-10	+90	-15	+100	no	■■■■	■■■■	Very low	■■■■	Chlorine environment
Nonex 65	PVC	0	+100	-5	+115	yes	■■■■	■■■■	High	■■■■	Impregnation AmDough bakery extraction belts
Ropanyl 93	TPU	-20	+90	-30	+110	yes	■■■■	■■■■	Low	■■■■	Impregnation AmDough bakery extraction belts
Silam K	Si	-50	+190	-80	+220	yes	■■■■■■	■■■■■■	High	■■■■	Temperature, non-stick
Silam B, S	Si	-50	+190	-80	+220	yes	■■■■■■	■■■■■■	Very high	■■■■	Food, temperature, non-stick

Feasibility table


Material	Nonex *	Nonex **	Flexam *	Flexam **	Ropanyl *	Ropanyl **	Ropanyl D60 *	Ropanyl D60 **	Ultranyl *	Ultranyl **	Ropan *	Ropan **	Ropanol *	Ropanol **	Polam A-H *	Polam A-H **	Poliflex *	Poliflex **	Peflex *	Peflex **	Amtel *	Amtel **	Pletex *	Pletex **	Silam B *	Silam B **	Silam K *	Silam K **	Silam S *	Silam S **
Nonex	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Flexam	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Ropanyl	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Ropanyl D60	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Ultranyl	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Ropan	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Ropanol	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Polam A-H	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Poliflex	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Peflex	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Amtel	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Pletex	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Silam B	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Silam K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Silam S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	

*: Combination top and bottom cover and/or impregnation **: Combination top-top or bottom-bottom cover and/or impregnation


Applying table

Description	Cover materials	Width min mm	Width max mm	Length min mm	Length max mm
Applying Ropan Coating	Ropan	40	1100	1500	70000
		1101	2100	2500	70000
		2101	3400	5000	60000
Applying Thermoplastic Paste Coating	Flexam, Nonex, Pletex	40	400	600	80000
		401	1050	600	80000
		1051	1200	2100	80000
		1201	1500	2100	80000
		1501	1900	2500	80000
Applying Thermoplastic Powder Coating	Amtel, Peflex, Poliflex, Ropanyl, Ultranyl	40	1200	826	80000
		1201	1600	2000	80000
		1601	1900	3500	80000
Applying Thermoset Coating	Ampac, Polam, Ropanol, Silam K	40	1150	400	50000
		1151	2000	1500	50000
		2001	3400	1800	50000
Applying Thermoset Silam B/S Coating	Silam B, Silam S	40	800	600	80000
		801	1900	2000	80000

Profiles

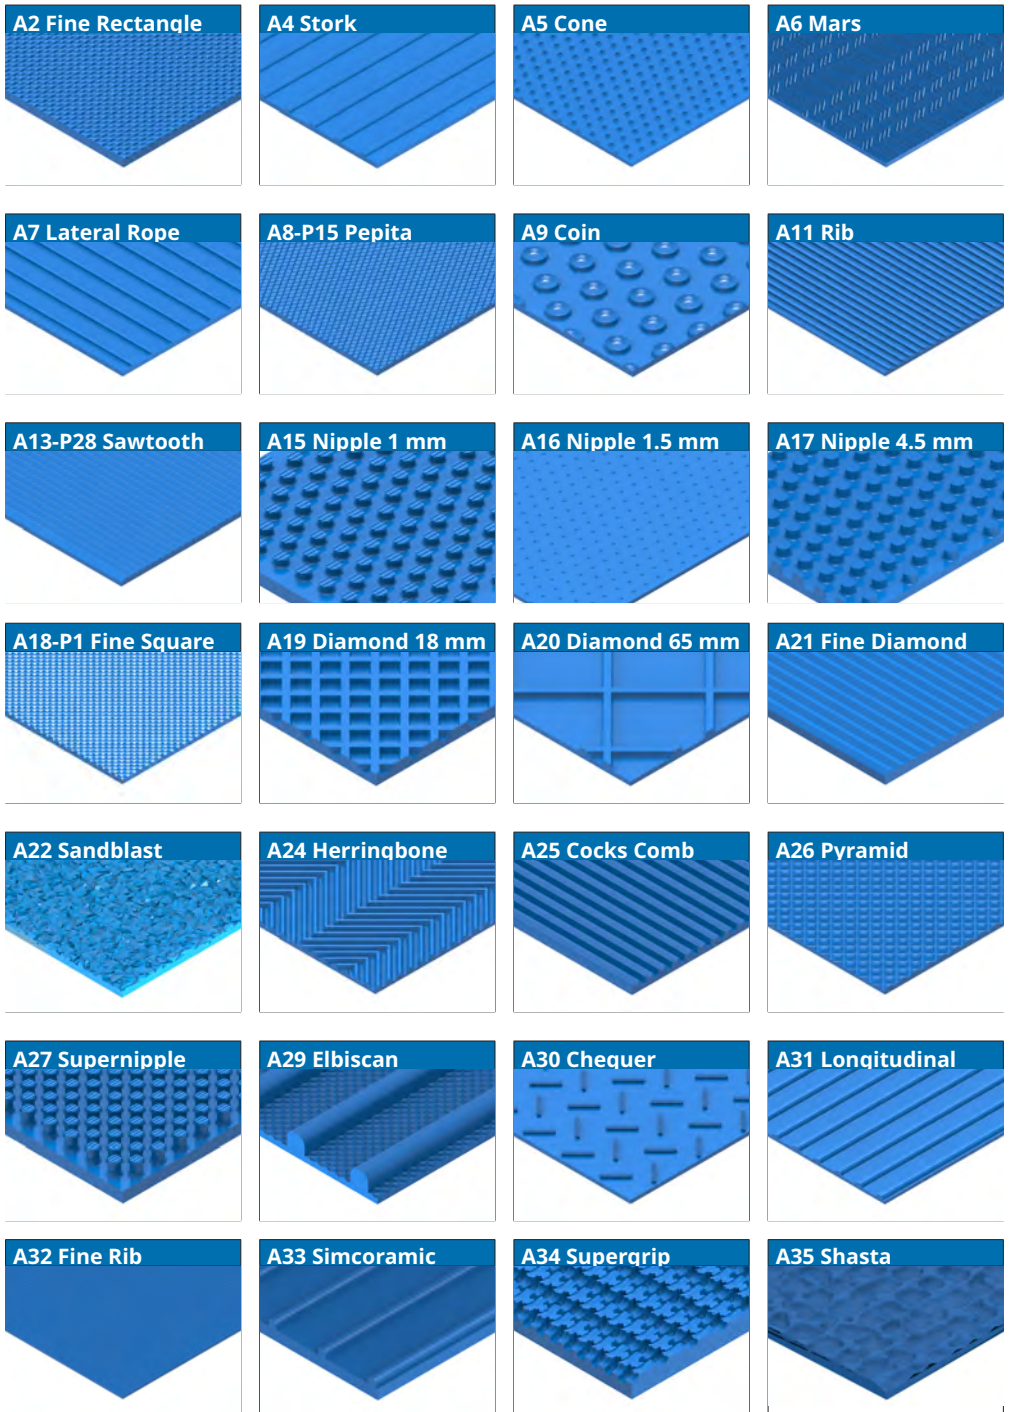


A36 Nubby



A39 Fine Square




A42 Supergrip




A43 Alkemade




A44 Interrib




A45 Bermuda



A46 Button




A47 AmWeave




A50 Wavegrip




A52 Modulus



A54-P33 Marathon




A57 Hellema




A58-P39 Charlie



A61 Bounty



A69 Trapezium Rib




A72-P72 Sphere




A79 Diamond




A81 Optima




A84 Weaveprint



A93 Rhombus



A94 Berrytek



Profiles

Profiles														
Profile type	Exclusive	Length max m'	Narrow profile drum			Wide profile drum			Max. hardness Shore					
			Width max. mm	Length min. m'	Length max. m'	Width max. mm	Length min. m'	Length max. m'	A				D	
									Flexam	Nonex	Ropanyl	Peflex	Poliflex	Amtel
A0 Matt M2		108	1150	0.9	108	1950	5	80	95	70	93	30	33	40
A2 Fine rectangle		108			108	1950	5	80	80	70	93	30	33	40
A4 Stork		108	1000	0.9	108			80	55	40	93	30	33	40
A5 Cone		108	1110	0.9	108	1950	6	80	80	70	93	30	33	40
A6 Mars	✦	108	1150	0.9	108	1950	5	80	80	70	93	30	33	40
A7 Lateral Rope		108	1150	0.9	108			80	55	65	93	30	33	40
A8 / P15 Pepita		108	1150	0.9	108	1950	5	80	95	70	93	30	33	40
A9 Coin		108	1150	1.5	108			80	70	70	93	30	33	40
A11 Rib		108	1150	0.9	108			80	55	65	93	30	33	40
A13 / P28 Sawtooth		50	1150	2.5	50	1800	6	50	55	65	93	30	33	40
A15 Nipple 1 mm		108	1150	0.9	108	1950	5	80	80	70	93	30	33	40
A16 Nipple 1.5 mm		108	1110	1.15	108			80	80	70	93	30	33	40
A17 Nipple 4.5 mm		50	1120	2.5	50			50	70	65	93	30	33	40
A18 / P1 Fine square		108	1150	0.9	108	1950	5	80	95	70	93	30	33	40
A19 Diamond 18 mm		50	1150	2.5	50	1700	6	50	55	40	93	30	33	40
A20 Diamond 65 mm		50	1150	2.5	50	1500	5	50	45	40	93	30	33	40
A21 Fine diamond		108	1150	0.9	108	1950	5	80	95	70	93	30	33	40
A22 Sandblast		108	1150	0.9	108	1950	5	80	95	70	93	30	33	40
A24 Herringbone		108	950	0.9	108			80	55	65	93	30	33	40
A25 Cocks Comb		50	1150	2.5	50			50	45	40	93	30	33	40
A26 Pyramid		108	1100	0.9	108			80	55	65	93	30	33	40
A27 Supernipple		108	1060	2.5	108			80	55	65	93	30	33	40
A29 Elbiscan		50	1150	1.15	50			50	45	65	93	30	33	40
A30 Chequer		108	1070	1.15	108			80	80	65	93	30	33	40

Profile type: * Structure ↓ Longitudinal ↔ Lateral □ Square ○ Round

Profile type		Min. cover thickness mm		Increase belt thickness mm	Profile type	Indication of use
		Width ≤ 800 mm	Width > 800 mm			
A0	Matt M2	0.3	0.3	-	✳	To reduce adhesion Prevents light reflection
A2	Fine rectangle	0.3	0.3	0.1	□	To give the product a profile Chocolate cooling tunnel
A4	Stork	2.5	2.5	2.0	↑↓	Infeed belt for packaging machines
A5	Cone	1	1.5	2.0	○	For magnetic elevators – Scanning applications
A6	Mars	0.3	0.3	0.1	✳	Gives impression on chocolate product Releasing over knife edge Minigrip profile
A7	Lateral Rope	2	2.5	1.6	↔	Product separation Small incline bulk products
A8 /	P15 Pepita	0.3	0.3	0.1	□	For inclined transport Light duty accumulation
A9	Coin	2	2.5	2.5	○	Inclined transport of bags, crates, wooden boxes Inclined transport of half pigs Meat derining machines
A11	Rib	2	2.5	1.5	↔	Inclined conveyors, boxes/crates/bags, dry conditions Lagging material for drums On tracking strips
A13 /	P28 Sawtooth	2	2.5	0.95	↔	Fish industry Transport of tobacco and tea leaves on inclined conveyors Other fine grained materials If embossed in the bottom cover for slip free drive under very wet conditions
A15	Nipple 1 mm	0.5	0.7	0.7	○	Lagging material on drums In laundries In magnetic elevators In the packaging industry For elevating light products up a limited angle of inclination
A16	Nipple 1.5 mm	0.7	0.7	0.9	○	In magnetic elevators
A17	Nipple 4.5 mm	2	2.5	3.2	○	Transport of heavy products under wet conditions In laundries As a support belt in metal polishing installations Inclined transport of bags
A18 /	P1 Fine square	0.5	0.5	0.4	□	Accumulation In bakeries for dough transport Rubber industry for the transport of unvulcanised rubber Soft separator
A19	Diamond 18 mm	4	5	2.0	□	On grinding belts Inclined transport, e.g. bulk
A20	Diamond 65 mm	3.5	4	3.4	□	Inclined transport of baggage Transport of leaf products Inclined transport for bulk handling of tea, sugar, cocoa, and also potatoes
A21	Fine diamond	0.3	0.3	0.1	□	Good release properties
A22	Sandblast	0.5	0.5	0.2	✳	Lagging material on drums Where a belt requires a 'rough' surface
A24	Herringbone	2	2.5	1.4	↔	Inclined conveying of light bulk materials, fine grained products and fish Separator application
A25	Cocks comb	4	5.5	3.0	↔	Despite the shape easy to clean Lagging material on drums In box closing machines Conveying of crates in wet conditions
A26	Pyramid	2	2.5	1.3	↔	Transport of small articles Non-slip floor covering under dry conditions Decorative, e.g. lagging counters
A27	Supernipple	2	2.5	1.7	○	Universal profile for inclined applications under dirty circumstances
A29	Elbiscan	2	2.5	2.5	↑↓	Sorting machines for vegetables (blueberries)
A30	Chequer	1	1	1.5	✳	Check-in belt on airports (small angle of inclination) Easy clean profile

Profiles

Profile type		Exclusive	Length max m ¹	Narrow profile drum			Wide profile drum			Max. hardness Shore					
				Width max. mm	Length min. m ¹	Length max. m ¹	Width max. mm	Length min. m ¹	Length max. m ¹	A			D		
										Flexam	Nonex	Ropanyl	Peflex	Poiflex	Antel
A31	Longitudinal		50	1100	0.9	50			50	55	65	93	30	33	40
A32	Fine rib		108	1150	0.9	108	1950	5	80	80	70	93	30	33	40
A33	Simcoramic		50			50	1900	5	50	55	40	93	30	33	40
A34	Supergrip		50	1050	1.15	50	1950	6	50	55	65	93	30	33	40
A35	Shasta	❖	108			108	1950	5	80	55	65	93	30	33	40
A36	Nubby		108			108	1950	5	80	55	65	93	30	33	40
A39	Fine square		108	1150	0.9	108	1950	5	80	95	70	93	30	33	40
A42	Supergrip		50	1150	1.15	50	1950	6	50	55	65	93	30	33	40
A43	Alkemade		108	600	0.9	108			80	70	70	93	30	33	40
A44	Interrib		108			108	1850	6	80	80		93	30	33	40
A45	Bermuda		108	1150	0.9	108			80	70	70	93	30	33	40
A46	Button		108	1150	0.9	108			80	70	65	93	30	33	40
A47	AmWeave		108			108	1950	5	80	80	70	93	30	33	40
A50	Wavegrip		108	1080	0.9	108	1950	5	80	55	65	93	30	33	40
A52	Modulus		108	500	2.5	108			80	45	40	93	30	33	40
A54 /	P33 Marathon		108			108	1950	5	80	95	70	93	30	33	40
A57	Hellema	❖	50	400	0.9	50			50	55	65	93	30	33	40
A58 /	P39 Charlie		108			108	1950	5	80	80	70	93	30	33	40
A61	Bounty	❖	108			108	1950	5	80	80	70	93	30	33	40
A69	Trapezium rib		50	1100	0.9	50			50	55	65	93	30	33	40
A72	Sphere		108	1150	2.5	108			80	70	65	93	30	33	40
A79	Diamond		108			108	1950	6	80	55	40	93	30	33	40
A81	Optima		108	1150	0.9	108		80		80	70	93	30	33	40
A84	Weaveprint		108	1150	0.9	108			80	80	70	93	30	33	40
A93	Rhombus		108	1150	0.9	108				95	70	93	30	33	40
A94	Berrytek	❖	50	1100	0.9	50			50	55	65	93	30	33	40
A110	Matt M1		108	1150	0.9	108	1950	5	80	95	70	93	30	33	40
T10	Ultrasync		108	1150	0.9	108			80	55	65	93	30	33	40

Profile type: * Structure † Longitudinal ↔ Lateral □ Square ○ Round

Profile type		Min. cover thickness mm		Increase belt thickness mm	Profile type	Indication of use
		Width < 800 mm	Width > 800 mm			
A31	Longitudinal	2	2	2.5	↑	Sorting of vegetables
A32	Fine rib	0.7	0.7	0.3	↑	Inclined transport especially in dusty circumstances. Belts for counting of products in packaging machines, e.g. candy bars
A33	Simcoramic	2.5	2.5	1.7	↑	Sorting machines for vegetables
A34	Supergrip	2	2	1.2	✳	Universal profile for inclined applications, for elevating crates, boxes and bags under dry conditions In the packaging industry (box closing machines)
A35	Shasta	0.7	0.7	1.0	✳	Leather impression
A36	Nubby		0.7	0.7	✳	Sealing tile profile Non-slip tape lagging
A39	Fine square	0.3	0.3	0.1	□	Accumulation In bakeries for dough transport Rubber industry for the transport of unvulcanised rubber Separator
A42	Supergrip	2	2.5	1.2	✳	Universal profile for inclined applications, for elevating crates, boxes and bags under dry conditions In the packaging industry (box closing machines)
A43	Alkemade	2	2	0.45	↔	Sorting machines for vegetables Infeed meat
A44	Interrib	1.4	1.4	1.1	↑	Inclined transport of tobacco leaves Easy cleaning profile
A45	Bermuda	1.2	1.5	0.5	↔	Sorting machines for vegetables Infeed meat
A46	Button	1.2	1.5	1.8	○	Inclined transport Laundries Easy cleaning profile
A47	AmWeave	0.7	0.7	0.3	✳	Inclined applications in dry conditions Meat industry
A50	Wavegrip	0.7	0.7	0.7	✳	Low Supergrip profile Low noise
A52	Modulus	6	NA	3	↔	Guiding ropes Horizontal vacuum filters
A54 /	P33 Marathon	0.7	0.7	0.5	✳	Non-slip profile Treadmill
A57	Hellema	2.5	NA	0.5	✳	Chocolate moulding belt
A58 /	P39 Charlie	0.3	0.3	0.1	□	Chocolate embossing Fish derining machines
A61	Bounty	0.3	0.3	0.1	✳	Chocolate embossing
A69	Trapezium rib	2	2	2.5	↑	Sorting machines for vegetables Infeed packaging machines Reversed positive guiding
A72	Sphere	2	2	2.4	○	Ski treadmills Easy cleaning profile
A79	Diamond	4	5	2	□	Grinding belts Inclined transport of bulk products
A81	Optima	1	1.5	1.5	○	For magnetic elevators - Scanning applications
A84	Weaveprint	0.5	0.7	0.5	✳	In the packaging industry In the food industry Non-slip profile in the textile industry
A93	Rhombus	0.4	0.5	0.35	□	Accumulation In bakeries for dough transport Rubber industry for the transport of unvulcanised rubber Soft separator
A94	Berrytek	2	2	2.5	↑	Sorting of vegetables (blueberries)
A110	Matt M1	0.3	0.3	-	✳	To reduce adhesion/accumulation/Prevents light reflection
T10	Ultrasync	2	2.5	1.5	↔	Base profile Ultrasync Incline bulk products

Standard Applications

Standard Product Range

Belt Type	Material	Weave	Belt thickness [mm]	Diameter of knife edge < 135°	Article code
AmDough 100	cotton	broken twill	2,8 mm	5 mm	GK 1283B
AmDough 90	cotton	broken twill	2,4 mm	4 mm	GK 0983B
AmDough 80	cotton/ polyamide	broken twill	2,4 mm	4 mm	GK 8484BP
AmDough 70	cotton	plain	2,0 mm	3 mm	P 1284B
AmDough 60	cotton/ polyamide	broken twill	2,4 mm	4 mm	GK 0983BP universal type
AmDough 50	cotton/ polyamide	plain	1,8 mm	3 mm	P 8484BP universal type
AmDough 40	cotton/ polyamide	plain	2,0 mm	3 mm	P 1284BP
AmDough 20	cotton/ polyester	plain	2,0 mm	3 mm	P 4060BE

There is a linear relationship between the AmDough absorption numbers: Heavy dough: wet, high degree of moisture, AmDough Belt with higher absorption factor | Light dough: dry, low degree of moisture, AmDough Belt with lower absorption factor

Top side: always uncoated | Bottomside: PUR transparent food grade impregnation for stability, better wear resistance and longer belt life | Belt edges: reinforced polyamide selvedges | Dimension: length up to 100 m, width up to 3400 mm | Broken twill types (GK) are also available as Twill (K) versions

Example of Seamless Endless Woven Separator Belts

Belt Type	AmSqueeze 300	AmSqueeze 500	AmSqueeze 700
Example Article description	AS 314 A93-A93	AS 514 A93-A93	AS 714 A93-A93
Top cover material	TPU 3 mm Ropanyl 76 (ShA) FG	TPU 3 mm Ropanyl 85 (ShA) FG	TPU 3 mm Ropanyl 93 (ShA) FG
Top cover color	Ivory	White	Transparent
Standard finish covers	A93 Rhombus profile	A93 Rhombus profile	A93 Rhombus profile
Standard belt thickness	13.4 mm	13.4 mm	13.4 mm
Other available belt thickness	15,16,17,18,19,20 mm	15,16,17,18 mm	15,16,17,18 mm
Grip	++++	+++	+++
Wear resistance	+++	++++	++++
Yield	++++	+++	+++
Food Grade	EC/FDA	EC/FDA	EC/FDA
Indication application	Soft	Medium	Hard
Replaces	Rubber	PU	PU hard

Consult our application engineers and product information for other options | A questionnaire for belt selection is available | Tolerance on length ±1% Width -0/+2 mm | Closed edges skived

General Technical Data – Seamless Endless Woven Tube Winding Belts

Belt type	AmTube 500	AmTube 700
Article code	GK 1002	GK 1752
Weave	broken twill weave	broken twill weave
Fabric	polyester	polyester
Force at % elongation	50 N/mm (1%)	90 N/mm (1%)
Cover	PUR: white Ropan 70 Shore A	PUR: white Ropan 70 Shore A
Coefficient of friction	0.8	0.8
Total belt thickness	4 - 7 mm	8 - 14 mm
Tube diameter	40.0 mm and more	60 mm and more
Wall thickness	2 - 8 mm	4 mm and more
Necessary belt width	10 mm smaller than feed paper	10 mm smaller than feed paper
Min. tube diameter	10 x belt thickness	10 x belt thickness
Temperature resistance	max. 90 °C	max. 90 °C
Belt length	2500 - 70000 mm	2500 - 7000 mm
Belt width	40 - 800 mm	40 - 800 mm
Edge finish	fully closed over min. 5.0 mm	fully closed over min. 5.0 mm

General Technical Data – Seamless Endless Woven Cable Pulling Belt

AmPull Fabric Range	Weave	Fabric	Max belt tension N/mm at 2% Elongation	Max Cable pulling force in N per 100mm Belt width	Edge finish
GK1002SE	Broken Twill Weave	100% Polyester	100	10500	Red spun
GK1402SE	Broken Twill Weave	100% Polyester	140	14500	Red spun
GK1752SE	Broken Twill Weave	100% Polyester	175	18500	Red spun
GK1752FE	Broken Twill Weave	100% Polyester	175	18500	Spun Yarn
GK2502SE	Broken Twill Weave	50% Polyester/50% Aramide	250	26500	Red spun
GK4502SE	Broken Twill Weave	30% Polyester/70% Aramide	450	47500	Red spun
Top Cover Material		Hardness	Finish		
Nonex PVC		20°, 30°, 40°, 55°, 65°, 70°, 80° Shore A	Smooth		
Ropan PUR		70°, 80°, 90° Shore A	Ground		
Ropanyl TPU		76°, 85°, 93° Shore A	Smooth		
Silam SI		10°, 40°, 50°, 55°, 60° Shore A	Smooth or Ground		
Bottom Cover Material		Hardness	Finish		
Nonex PVC		80° Shore A	Smooth		
Ropan PUR		70°, 80°, 90° Shore A	Ground		
Ropanyl TPU		76°, 85°, 93° Shore A - 60° Shore D	Smooth		

General Technical Data – Seamless Endless Woven Metal Wrapping Belts

Fabric Range	Application	Weave	Fabric	Max belt tension N/mm at 2% Elongation	Thickness mm
AmWrap GK112	Cold (AmWrap C)	Broken Twill Weave	100% Polyester	40	2.5
AmWrap GK1002	Cold (AmWrap C)	Broken Twill Weave	100% Polyester	100	1.6
AmWrap GK1402	Cold (AmWrap C)	Broken Twill Weave	100% Polyester	140	3.0
AmWrap GK1752	Cold (AmWrap C)/ Temperature (AmWrapT) **	Broken Twill Weave	100% Polyester	175	3.5
AmWrap GK2502	Cold (AmWrap C)/ Temperature (AmWrapT) ***	Broken Twill Weave	50% Polyester / 50% Aramide	250	3.0
AmWrap H300	Hot (AmWrap H)	Broken Twill Weave	100% Aramide	140 N (1% elongation)	7.0
AmWrap H700	Hot (AmWrap H)	Broken Twill Weave	100% Aramide	140 N (1% elongation)	8.5
Top Cover Material	Application	Hardness or Density	Finish	Min Thickness mm	Max Thickness mm
Ropan PUR	Cold	70°, 80°, 90° Shore A	Ground	1.0	6.0
Ropanyl TPU	Temperature	60° Shore D	Smooth	1.0	3.0
Aramide Needlefelt	Hot	1000 g/m² for AmWrap H300	Felt	2.0	2.0
Aramide Needlefelt	Hot	1300 g/m² for AmWrap H700	Felt	3.5	3.5
Bottom Cover Material	Application	Hardness	Finish	Min Thickness mm	Max Thickness mm
Nonex PVC	Cold	55°, 65° Shore A	Smooth or profiled A21	0.5	1.0
Ropan PUR	Cold	70°, 80°, 90° Shore A	Ground	1.0	3.0
Ropanyl TPU	Temperature	93° Shore A	Smooth	0.5	1.0

General Technical Data – Seamless Endless Woven AmPress Belt

Fabric Range	Weave	Fabric	Max belt tension N/mm at 2% Elongation	Thickness mm	Edge finish
AmPress GK1752	Broken Twill Weave	100% Polyester-Bekinox cc 20 mm	175	3,5	Spun Yarn or Ropan closed edges*
Top Cover	Hardness or Density	Finish	Min Thickness mm	Max Thickness mm	Max Temperature °C
Ropan PUR	80° Shore A	Ground	2.0	2.	80
Bottom cover	Hardness	Finish	Min thickness mm	Max Thickness mm	Max Width
Ropan PUR	80° Shore A	Ground	2.0	2.0	3400
Ropanol PUR		Impregnation	0.1	0.1	3400

Local Contacts

... and 150 more service contact points
at ammeraalbeltech.com

Argentina

T +54 11 4218 2906
info-ar@ammeraalbeltech.com

Australia

T +61 3 8780 6000
info-au@ammeraalbeltech.com

Austria

T +43 171728 133
info-de@ammeraalbeltech.com

Belgium

T +32 2 466 03 00
info-be@ammeraalbeltech.com

Canada

T +1 905 890 1311
info-ca@ammeraalbeltech.com

Chile

T +56 2 233 12900
info-cl@ammeraalbeltech.com

China

T +86 512 8287 2709
info-cn@ammeraalbeltech.com

Colombia

T +57 893 9890
info-co@ammeraalbeltech.com

Czech Republic

T +420 567 117 211
info-cz@ammeraalbeltech.com

Denmark

T +45 7572 3100
info-dk@ammeraalbeltech.com

Finland

T +358 207 911 400
info-fi@ammeraalbeltech.com

France

T +33 3 20 90 36 00
info-fr@ammeraalbeltech.com

Germany

T +49 4152 937-0
info-de@ammeraalbeltech.com

Hungary

T +36 30 311 6099
info-hu@ammeraalbeltech.com

India

T +91 44 265 34 244
info-in@ammeraalbeltech.com

Israel

T +972 4 6371485
info-il@ammeraalbeltech.com

Italy

T +39 051 660 60 06
info-it@ammeraalbeltech.com

Japan

T +81 52 433 7400
info-jp@ammeraalbeltech.com

Luxembourg

T +352 26 48 38 56
info-lu@ammeraalbeltech.com

Malaysia

T +60 3 806 188 49
info-my@ammeraalbeltech.com

Mexico

T +52 55 5341 8131
info-mx@ammeraalbeltech.com

Netherlands

T +31 72 57 51212
info-nl@ammeraalbeltech.com

Poland

T +48 32 44 77 179
info-pl@ammeraalbeltech.com

Portugal

T +351 22 947 94 40
info-pt@ammeraalbeltech.com

Singapore

T +65 62739767
info-sg@ammeraalbeltech.com

Slovakia

T +421 255648542
info-sk@ammeraalbeltech.com

South Korea

T +82 31 448 3613-7
info-kr@ammeraalbeltech.com

Spain

T +34 93 718 3054
info-es@ammeraalbeltech.com

Sweden

T +46 (0) 10 130 96 00
info-se@ammeraalbeltech.com

Switzerland

T +41 55 2253 535
info-ch@ammeraalbeltech.com

Thailand

T +66 2 902 2604-13
info-th@ammeraalbeltech.com

Turkey

T +90 232 877 0700
info-tr@ammeraalbeltech.com

United Kingdom

T +44 1992 500550
info-uk@ammeraalbeltech.com

United States

T +1 847 673 6720
info-us@ammeraalbeltech.com

Vietnam

T +84 8 376 562 05
info-vn@ammeraalbeltech.com

**Expert advice, quality solutions
and local service
for all your belting needs**



General contact information:

Ammeraal Beltech
P.O. Box 38
1700 AA Heerhugowaard
The Netherlands

T +31 (0)72 575 1212
info@ammeraalbeltech.com

ammeraal.com